



## Balun Cores / RHH, R4H, R6H, R8H Type

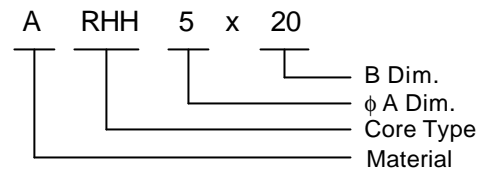

## Product Identification

Materials: A, B, B<sub>246</sub>, D<sub>2</sub>, K

Balun Cores employed in balance-unbalance transformers have wide application today not only in the input circuits to TV and FM tuners but also in CATV networks and installations.

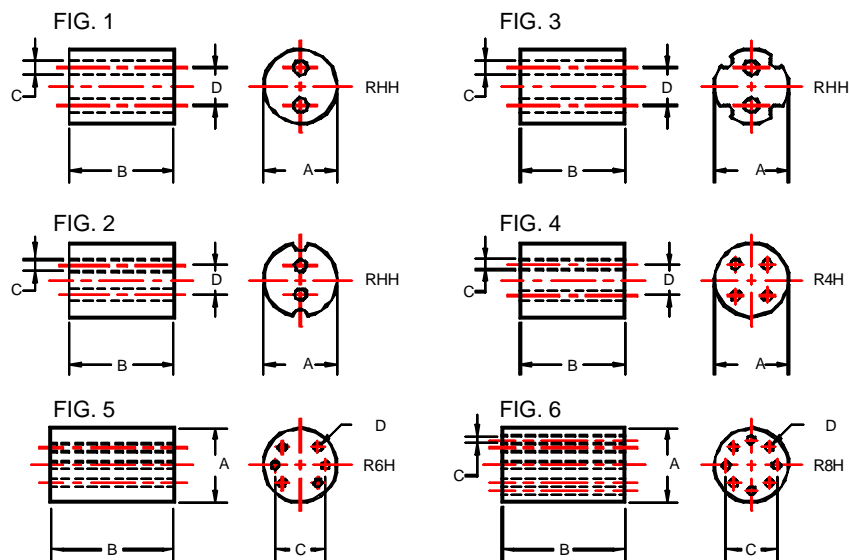

## Dimensions

Cores	A	B	C	D	Fig
RHH 6 × 3	6±0.2	3±0.2	1.3±0.15	3±0.15	1
RHH 6.35 × 12	6.35±0.3	12±0.5	1.5±0.15	3±0.15	1
RHH 7 × 5.5	7±0.2	5.5±0.3	1.5±0.15	3±0.15	1
RHH 7.2 × 5.5	7.2±0.2	5.5±0.3	1.3±0.15	3±0.15	2
RHH 7.6 × 4.2	7.6±0.2	4.2±0.3	1.5±0.15	3±0.15	3
R4H 6.3 × 6.5	6.3±0.2	6.5±0.3	1.1±0.15	2.4±0.15	4
R4H 8 × 5	8.0±0.2	5±0.3	1.5±0.15	3.2±0.15	4
R6H 6 × 10 × 0.85	6.0±0.2	10±0.4	3.4±0.15	0.85±0.1	5
R8H 5.2 × 10 × 0.85	5.33±0.2	10±0.4	3.3±0.15	0.85±0.1	6